



TILING

PRODUCT RANGE 2021



Tile adhesives
Grouts
Admixtures
Silicones

**TRADIES
TRUST**

ADHESION TYPE:

C

Cementitious adhesive

D

Dispersion adhesive

R

Reaction adhesive

ADHESION CAPACITY:

1

Normal adhesives
Standard strength tile adhesive

2

Improved adhesives
Stronger tile adhesive

OPTIONAL CLASSES:

F

Faster setting/drying adhesive
Quicker setting of the adhesive allowing for earlier grouting

T

Reduced slip adhesives
No slipping of wall tiles

E

Adhesives with extended open time
Once spread, the adhesive can be left without a tile being fixed for a longer time

S1

Deformable adhesives
For cementitious adhesives only

S2

Highly deformable adhesives
(for cementitious adhesives only)



TILE ADHESIVE RANGE

Polymer adhesives
Cement adhesives.
Pre mixed adhesives

**TRADIES
TRUST**



TileBond Extra

Premium white cement based tile adhesive

TileBond Extra is a reliable white cement. It is excellent for rigid fixing requirements such as pavers and landscaping.

ADVANTAGES

- White cement based
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Concrete floors and walls
- Rendered brickwork, block work

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C1E |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 4-5m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG - RL7110-20 |



MoreFlex

Flexible, rubber modified tile adhesive

Moreflex is a rubber modified, flexible white cement based tile adhesive. It can be used internally or externally on wall and floor surfaces

ADVANTAGES

- Flexible
- White cement based
- Non lipping
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work
- Fibre cement

QUICK REF GUIDE

| | |
|------------|---|
| Colour | White (or grey) |
| Class | C1S1ET |
| Area | Internal external |
| Uses | Wall Floor |
| Coverage | 8-10m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG - RL7165-20 20KG Grey - RL7166-20 |



TileFlex

Premium grade rubber modified adhesive

TileFlex is a rubber modified flexible white tile adhesive, it is non slump and ideal for large format tiles. It can be used for internal and external wall and floor applications.

ADVANTAGES

- Highly flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheet
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C2S1ET |
| Area | Internal External |
| Uses | Wall floor |
| Coverage | 7-8m² |
| Dry Time | 6-8 Hrs |
| Size- Code | 20KG - RL7145-20 |



AddFlex Plus

Flexible, high strength, rubber modified adhesive

Addflex Plus is a rubber modified, non slump flexible white cement based tile adhesive. Designed for bonding all types of ceramic, stone and mosaic tiles onto a variety of substrates like concrete, render, rendered brickwork, block work, Gyprock, plasterboard and fibre cement surfaces.

ADVANTAGES


- Flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheet
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C2S1T |
| Area | Internal external |
| Uses | Wall Floor |
| Coverage | 8m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG - RL7545-20 |

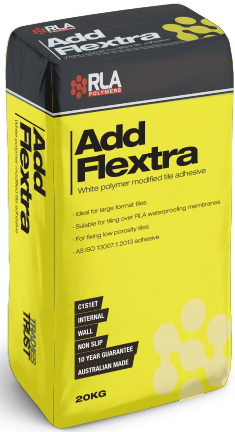

AddFlextra

White polymer modified tile adhesive

AddFlextra is a rubber modified flexible white cement based tile adhesive, with excellent high coverage ability. AddFlextra can be used to tile over existing tiles as long as the surface is coated with RLA Universal Primer.

ADVANTAGES


- Strong Bond
- Low VOC
- Non slump
- Excellent coverage
- Ideal for large format tiles
- Fixing low porosity tiles

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work
- F/C Sheet

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C2S1ET |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 10-12m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG -RL7550-20 |

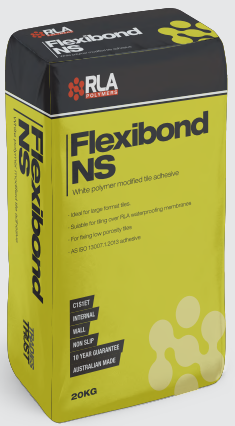

Flexibond NS

White polymer modified tile adhesive.

Flexibond NS is a polymer modified, Non Slip flexible white cement based tile adhesive. It is designed for bonding all types of ceramic, stone and mosaic tiles onto a variety of substrates.

ADVANTAGES

- Ideal for large format tiles
- White cement based
- Non slip
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

| | |
|------------|---------------------------|
| Colour | White |
| Class | C1S1ET |
| Area | Internal |
| Uses | Wall |
| Coverage | 12-14m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG - RL7140-20 |



Mastik

Economical & flexible polymer modified adhesive

RLA Mastik is an economical, flexible polymer modified adhesive with great mastik properties for bonding most types of ceramic and porcelain tiles (with the exception of moisture sensitive stone and marbles). Ideal for large format tiles.

ADVANTAGES

- Flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|---|
| Colour | White / Grey |
| Class | C2S1ET |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 7m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG White - RL7152-20 20KG Grey - RL7122-20 |



Lite

Lightweight flexible tile adhesive

RLA LITE is a smooth, non sanded, multiple purpose, flexible, white tile adhesive. It is non slip/non slump and ideal for large format tiles. It can be used internally or externally on wall and floor surfaces and can be used for fixing Porcelain and Vitrified tiles.

ADVANTAGES

- Lightweight technology
- Non slip / Non Slump
- Flexible
- Extended coverage
- Extended open time
- High bond strength

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | Off white |
| Class | C2S1ET |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 5-6m² |
| Dry Time | 24 Hrs |
| Size- Code | 14KG - RL7121-14 |



UniGrip

Premium grade polymer modified, highly flexible adhesive

Unigrip is non slip/non slump and ideal for large format tiles and can be used for fixing Porcelain and Vitrified tiles. Unigrip can be used to fix tiles over existing tiles and can be used to fix tiles over most waterproofing membranes. Unigrip can be used for fixing tiles in fully immersed situations like swimming pools and spas and can be used over some acoustic mats.

ADVANTAGES

- Highly Flexible
- Use in immersed situations
- Non slump / Non Slump
- Use over green screeds
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C2S2ET |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 6-7m² |
| Dry Time | 24 Hrs |
| Size- Code | 15KG - RL7153-15 |



OneFlex

Rubber filled, polymer modified tile adhesive

OneFlex is a premium grade flexible 1 part rubber modified off white tile adhesive for internal and external floor applications. It can be used over timber flooring boards.

ADVANTAGES

- Strong Bond
- Low VOC
- Highly flexible
- Good coverage
- For use over timber
- Fixing low porosity tiles

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- Timber floorboards
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C1S2ET |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 9m² |
| Dry Time | 24 Hrs |
| Size- Code | 20KG - RL7172-20 |



FastSet

Rapid setting tile adhesive

RLA Fast Set is a high quality and cost effective rapid setting, polymer modified, grey cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
 - 3 Hours to Grout,
 - 6 Hours Foot Traffic
- Polymer modified, Non-slump.
- Over Green Screed.

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | Grey |
| Class | C2S1FTE |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 5-6m² |
| Dry Time | 6 Hrs |
| Size- Code | 20KG - RL7132-20 |



StoneSet

Moisture sensitive stone adhesive

RLA Stone Set is a premium grade rapid setting, polymer modified, White cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
 - 2 Hours to grout,
 - 4 Hours foot traffic
- Polymer modified, non-slump.
- Can be used over green screed.

SUBSTRATES

- Class A Moisture sensitive tiles.
- Plasterboard
- Rendered brickwork, block work
- Concrete / FC Sheeting
- RLA approved membranes

QUICK REF GUIDE

| | |
|------------|----------------------------|
| Colour | White |
| Class | C2S1FTE |
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 5-6m² |
| Dry Time | 4 Hrs |
| Size- Code | 20KG - RL7131-20 |

PolyMastic

Pre-mixed white acrylic tile adhesive

PolyMastic is an internal wall adhesive with superior non slump properties, specially designed for larger wall tiles. PolyMastic is a white acrylic based, flexible, premixed tile adhesive designed for bonding all types of porous ceramic, and mosaic tiles.

ADVANTAGES

- Easy to apply
- Non slip
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Fibre cement sheeting
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

| | |
|------------|--|
| Colour | White |
| Class | D1E |
| Area | Internal |
| Uses | Wall |
| Coverage | 7-10m² |
| Dry Time | 4 Hrs |
| Size- Code | 4LT - RL7194-4 15LT - RL7194-15 |





WATER PROOFING

RANGE



Liquid & cementitious membranes.
Moisture barriers, primers & Sealers.
Tapes & bandages.

**TRADIES
TRUST**



WPU

Class III Internal / External Waterproofing membrane

RLA WPU is an elastomeric one part polyurethane/Acrylic fibre reinforced water based membrane developed as a high performance internal / external membrane for most general waterproofing applications. It is suitable to be applied in external applications where a UV stable occasional trafficable membrane is required.

ADVANTAGES

- Tough & Flexible
- Class III Membrane
- CSIRO certified external use
- UV Stable
- Excellent adhesion
- Fast drying

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Decks, roofs.
- Internal/External wet areas

QUICK REF GUIDE

| | |
|------------|---|
| Colour | Grey |
| Class | III |
| Area | Internal / External |
| Coverage | Wall: 0.5mm DFT Floor: 0.9mm DFT |
| Size- Code | 4LT - 14443 15LT - 14442 |



WPM

Class III SBR Waterborne flexible under tile membrane

RLA WPM is a waterborne flexible waterproof membrane designed for use under tiled finishes that is capable of accommodating expected structural movement. RLA WPM is a certified Class III membrane and is compliant to AS4858:2004: "Wet Area Membranes", when applied in accordance to AS3740:2010 "waterproofing Wet Areas in Residential Buildings".

ADVANTAGES

- Permanently flexible
- Class III Membrane
- Quick drying
- Low VOC
- Excellent adhesion
- Fibre reinforced

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Shower recesses.
- Internal wet areas

QUICK REF GUIDE

| | |
|------------|---|
| Colour | Grey |
| Class | III |
| Area | Internal |
| Coverage | Wall: 0.5mm DFT Floor: 0.9mm DFT |
| Size- Code | 15LT - 14510 |

Cementitious membranes



2Part

UV Stable cementitious 2 part waterproofing membrane

2Part is based on high alumina fast setting cements and is mixed with a high solids water resistant pure acrylic. It combines the fast drying and excellent adhesion characteristics of traditional 2 part membranes with the excellent toughness, elongation and flexibility of modern acrylic membranes.

ADVANTAGES

- Good elongation
- Tough membrane
- Excellent adhesion
- Flexible

USES:

- Under tile on balconies, roofs
- Swimming pools
- Internal/External under tile areas.

QUICK REF GUIDE

| | |
|------------|---|
| Colour | Off white |
| Class | II |
| Area | Internal / External |
| Coverage | 16m² @ 2 coats, with a DFT of 1.2mm |
| Size- Code | 20LT Part A 20Kg Part B RL7190-KIT |



1Komponent

One Part, flexible, cementitious, fibre reinforced membrane

Specially formulated cementitious base incorporating graded aggregates and polymers, producing a highly flexible water proof membrane – capable of withstanding significant flexural strain. It is suitable for both positive and negative pressure – up to 25 metres (2.5 bars).

ADVANTAGES

- Apply by trowel for best results
- Can be applied by brush/roller
- Use on damp surfaces
- Versatile mixing ratio
- Excellent adhesion
- Flexible

USES:

- Under tile internal wet areas
- Under tile in external areas
- Concrete swimming pools
- Areas subject to hydrostatic pressure

QUICK REF GUIDE

| | |
|------------|--|
| Colour | Light Grey |
| Class | I |
| Area | Internal / External |
| Coverage | 1.17 kg/m² per mm of thickness |
| Size- Code | 20KG - 999729 |

PU850 UV

Moisture cured polyurethane waterproofing membrane

RLA PU850 UV cures to form a UV stable, seamless, tough, durable, elastomeric waterproofing membrane. RLA PU850 UV has excellent adhesion to most suitably primed building substrates and is suitable for above and below ground applications.

ADVANTAGES

- Fast curing
- UV Stable
- Tar and Bitumen free
- Permanently flexible
- Good Chemical resistance
- Excellent adhesion

USES:

- Retaining Walls
- Planter Boxes
- Internal wet areas, balconies & decks
- Rooftops
- Exposed applications



QUICK REF GUIDE

| | |
|------------|---------------------------------------|
| Colour | Grey |
| Class | III |
| Area | Internal / External |
| Coverage | 1.5L/m² @ 1.2mm DFT |
| Size- Code | 15LT - 750599 |

Primers & Sealers

PrimerPU

Liquid penetrating primer

PRIMER PU is a single pack penetrating waterproofing primer. It is formulated to compliment RLA's PU850 membrane, RLA AQUA BT and polyurethane sealants such as Flex-Pro PU. It improves the adhesion and performance of the membrane, 'locks-down' dust and loose materials, improves the spreading and application of the polyurethane membranes. For extremely porous substrates 2 coats may be required

ADVANTAGES

- One part - easy to apply
- Excellent strength
- Suitable on most porous substrates.

SUITABLE FOR USE:

- Concrete, Cement and cement render,
- Timber, Plaster Board
- Fibre Cement sheeting
- Brick and block work.



QUICK REF GUIDE

| | |
|------------|----------------------------------|
| Area | Internal / External |
| Coverage | 4m²/L per coat |
| Size- Code | 15LT - 730541 |

Moisture Seal

Epoxy water vapour barrier

Moisture Seal is a high performance 2 part epoxy waterproofing system designed as a water and vapour proof coating under water proofing systems, coatings, tiles and Timber flooring. It is designed for floor and wall applications where durability, water, and chemical resistance are required.

ADVANTAGES

- Low VOC
- Withstands a head of Water Pressure up to 25 metres or 250Kpa
- Complies with AS 4020:2005 "Products in contact with drinking water"
- Complies with ASTM E96 Water vapor transmission
- Water based and user friendly

SUITABLE FOR USE:

- Primer for damp surfaces, scyon sheeting, membranes & more
- Areas where hydrostatic pressure is an issue.
- Sealing concrete slabs before vinyl and timber overlays
- Dust sealing for interior concrete floors
- Retaining Walls, Planter boxes, Concrete Tanks, Lift Wells
- Basements, Reservoirs, Aquaducts, Underground Carparks
- As a Basecoat coating in areas requiring seamless epoxy flooring



QUICK REF GUIDE

| | |
|--------------------|---|
| Mixing ratio | 1:1 (component A:B) |
| Full cure | 5-7 days@25°C & 50%RH |
| Dry film thickness | 100 microns (approx.) |
| Wet film thickness | 200 microns |
| Coverage | 4-5m²/Litre |
| Size- Code | 8LT Kit - 15636 20LT Kit - 15637 |



Fillet & Joint Seal

Tough, Elastic & water resistant sealant

RLA Fillet and Joint Seal is a grey fast curing, low modulus, sealant that cures from moisture in the air to form a tough, elastic and water resistant sealant prior to the application of RLA polyurethane and waterproofing membranes.

ADVANTAGES

- High durability
- Excellent weather resistance
- Non staining
- Fast cure.

USES:

- Fillet joints to Internal wet areas to AS3740
- Fillet Joints to External wet areas to AS4654
- Expansion & control joints to internal wet areas
- Static cracks & sheet joins in internal wet areas.

QUICK REF GUIDE

| | |
|------------|--|
| Colour | Grey |
| Area | Internal / External |
| Coverage | 15mmx15mm fillet: 5.3m 20mmx20mm fillet: 3.0m |
| Size- Code | 600ml SSG - 620529 |

Accessories

Waterproof Tape

Non woven, polyester fabric for membranes

An open weave polyester reinforcing fabric for use of reinforcing RLA waterproofing membranes. Generally 2 Litres of waterproofing membrane per square metre of product is required to properly saturate and cover scrim tape.

ADVANTAGES

- Easy to apply giving additional strength
- Allows for greater product build up
- Eliminates sag of membrane on bond breakers

Size - Code

| | |
|---------------|----------|
| (100mm x 50m) | - 730663 |
| (200mm x 50m) | - 730662 |

Peel N' Stick Tape

Self stick reinforcing tape

RLA Peel N' Stick is a flexible membrane / reinforcing fabric combination designed to provide a simple yet excellent waterproofing solution and technique for joints, corners, cracks and gaps. Used in conjunction with waterproofing membranes, it provides the ultimate method in waterproofing and sealing joints, corners and cracks.

ADVANTAGES

- Has a tough, flexible and technically advanced waterproof backing.
- Highly deformable in both longitude and latitude
- Eliminates the need to reinforce the membrane over these areas.
- Gives greater protection than conventional methods of waterproofing.
- Provide double the waterproofing protection to critical areas.
- Aids in the prevention of slump in membranes over Bond-breakers

QUICK REF GUIDE

| | |
|------------|--------------------------|
| Colour | Off white / grey |
| Size- Code | 80mmx15m - 730555 |



Flexiband Roll



Elastic joint band roll

Detailing system designed for waterproofing and sealing all types of joints, junctions and general areas subject to movement. Featuring the central flexible area the Flexiband roll can accommodate movement in longitudinal, lateral and transverse directions enabling high elongation, rupture resistance, and up to 100% elastic recovery.

ADVANTAGES

- One part - easy to apply
- High flexible and tough
- Long term protection
- Rupture, chemical & water resistant.

BOND BREAKER FOR:

- Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

80mmx50m - 730694

Flexiband External Corner



Waterproofing external corners providing maximum protection at the most volatile areas, ensuring a quality watertight seal that accommodates movement in a variety of different waterproofing applications. Made from a unique grade of rubber, providing an elastic seal to line the wall / floor junction, forming a rupture resistant seal at corner intersections.

ADVANTAGES

- One part - easy to apply
- Pre-formed & heat welded
- Guarantee watertight assembly
- Rupture, chemical & water resistant.


BOND BREAKER FOR:

- External Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

x25 - 730695

Flexiband Internal Corner



Waterproofing internal corners providing maximum protection at the most volatile areas, ensuring a quality watertight seal that accommodates movement in a variety of different waterproofing applications. Made from a unique grade of rubber, providing an elastic seal to line the wall / floor junction, forming a rupture resistant seal at corner intersections.

ADVANTAGES

- One part - easy to apply
- Pre-formed & heat welded
- Guarantee watertight assembly
- Rupture, chemical & water resistant.


BOND BREAKER FOR:

- Internal Wall/Floor junctions
- Substrate abutments
- Control joints
- Movement & expansion joints

SIZE - CODE

x25 - 730696

Flexiband Tap Sleeves



Tap Sleeve enhances the seal around penetrations such as pipes, drainage outlets, cabling and any surface fixtures by protecting against movement, vibration and cracking. It provides a permanent tight rubber seal against water ingress enabling penetrations to withstand a variety of movement conditions without compromising the membrane seal.

ADVANTAGES

- Ensures an elastic seal at pipe penetrations
- Waterproof and a vapour barrier
- Long term sealing protection at volatile areas
- High Strength with excellent tear resistance
- Can be cut on site

SUITABLE FOR USE:

- Pipe penetrations
- Volatile areas needing protection

SIZE - CODE

x25 - 730697



GROUT RANGE



Coloured grouts.
Epoxy grouts.
Sanded grouts

**TRADIES
TRUST**



Smooth White Grout

Unsanded white cement based grout

Smooth white grout is an unsanded smooth white cement based grout. It is designed for use with most types of ceramic, mosaic and natural stone tiles. It can be used on internal wall joints only. It can be used in grout joints from 1- 3mm wide.

ADVANTAGES

- Mould resistant
- 1-3mm joints

SUBSTRATES

- Ceramic and mosaic tiles

QUICK REF GUIDE

| | |
|------------|--|
| Colour | White |
| Class | CG1 |
| Area | Internal |
| Uses | Wall |
| Size- Code | 2.5KG - RL9614W-2.5 10KG - RL9614W-10 20KG - RL9614W-20 |



Coloured Grout

High performance efflorescence grout

RLA Coloured Grout is a high performance stain & efflorescence resistant grout. It is designed for use with most types of Ceramic, Mosaic, Natural Stone and Glass Tiles. It can be used on internal & external wall and floor surfaces, and used in grout joints from 1 -15mm wide.

ADVANTAGES

- Mould resistant
- 1-15mm joints
- Efflorescence resistant
- Superior coverage

SUBSTRATES

- Ceramic and mosaic tiles
- Natural stone & glass tiles

QUICK REF GUIDE

| | |
|----------|----------------------------|
| Colour | 14 Colours |
| Class | CG1 |
| Area | Internal external |
| Uses | Wall floor |
| Coverage | Refer calculator |
| Dry Time | 24 Hours |

| |
|---------------|
| ARCTIC |
| ANTIQUE WHITE |
| BEIGE |
| BUFF |
| SANDSTONE |
| LIGHT GREY |
| SILVER GREY |

| |
|------------|
| MID GREY |
| SLATE |
| CHARCOAL |
| MOCHA |
| CAPPUCCINO |
| CHOCOLATE |
| BLACK |

| Size | Colour | Code |
|------|-------------|------------|
| 2KG | Mid Grey | RL9650W-2 |
| 10KG | Mid Grey | RL9650W-10 |
| 2KG | Light Grey | RL9651W-2 |
| 10KG | Light Grey | RL9651W-10 |
| 2KG | Silver Grey | RL9652W-2 |
| 10KG | Silver Grey | RL9652W-10 |
| 2KG | Slate Grey | RL9653W-2 |
| 10KG | Slate Grey | RL9653W-10 |
| 2KG | Charcoal | RL9654W-2 |
| 10KG | Charcoal | RL9654W-10 |
| 2KG | Black | RL9655W-2 |
| 10KG | Black | RL9655W-10 |
| 2KG | Arctic | RL9656W-2 |
| 10KG | Arctic | RL9656W-10 |

| Size | Colour | Code |
|------|---------------|------------|
| 2KG | Antique White | RL9657W-2 |
| 10KG | Antique White | RL9657W-10 |
| 2KG | Sandstone | RL9658W-2 |
| 10KG | Sandstone | RL9658W-10 |
| 2KG | Buff | RL9659W-2 |
| 10KG | Buff | RL9659W-10 |
| 2KG | Beige | RL9660W-2 |
| 10KG | Beige | RL9660W-10 |
| 2KG | Cappuccino | RL9661W-2 |
| 10KG | Cappuccino | RL9661W-10 |
| 2KG | Mocha | RL9662W-2 |
| 10KG | Mocha | RL9662W-10 |
| 2KG | Chocolate | RL9663W-2 |
| 10KG | Chocolate | RL9663W-10 |

* Colours are indicative only



EpoxyGrout

2 Component, epoxy grout

Two-part anti-acid epoxy mortar. Once mixed together, the two parts form a creamy mixture with excellent smoothness, which is also suitable for vertical no-slip application. Once hardened, the product is ultra high-performing in term of mechanical and chemical resistance. Grouting joints 1-15mm.

ADVANTAGES

- Easy to clean & use
- Flexible
- No Efflorescence or staining

SUBSTRATES

- Ceramic and mosaic tiles
- Surfaces exposed to aggressive chemicals.

QUICK REF GUIDE


| | |
|----------|----------------------------|
| Colour | 4 colours |
| Area | Internal external |
| Uses | Wall floor |
| Coverage | Refer calculator |
| Dry Time | 24 Hours |
| Size | 5KG kits |

| |
|----------|
| ARCTIC |
| MID GREY |

| |
|----------|
| SLATE |
| CHARCOAL |

| Size | Colour | Code |
|------|------------|--------|
| 5KG | Arctic | 620400 |
| 5KG | Mid Grey | 620401 |
| 5KG | Slate Grey | 620402 |
| 5KG | Charcoal | 620403 |

* Colours are indicative only

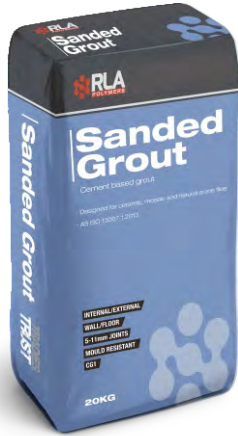

Sanded Grout

Unsanded cement based grout

RLA Sanded Grout is a cement based grout. It is designed for use with most types of Ceramic, Mosaic, and Natural Stone tiles. It can be used on internal & external floor joints. It can be used in grout joints from 5-12mm wide. It contains a biocide therefore making it mould resistant and can be applied in wet areas such as bathrooms and shower floors.

ADVANTAGES

- Mould resistant
- 5-12mm joints

SUBSTRATES

- Ceramic, mosaic & natural stone tiles

| |
|----------|
| MID GREY |
| SLATE |
| BLACK |

| Size | Colour | Code |
|------|------------|-----------|
| 20KG | Mid Grey | RL7220-20 |
| 20KG | Slate Grey | RL7222-20 |
| 20KG | Charcoal | RL7221-20 |

* Colours are indicative only

QUICK REF GUIDE

| | |
|--------|----------------------------|
| Colour | 3 colours |
| Area | Internal / External |
| Uses | Floor |



EpoxyWash

Epoxy and adhesive resin cleaner

Epoxy Wash aggressively cleans off epoxy and grout residues that can stain tile surfaces. Epoxy Wash is suitable for use over coloured grout joints. It is a strong acid with no fumes and is a water based industrial grade detergent. Epoxy wash is for interior/external use, on walls and floors.

SUITABLE RESIDUES:

- Epoxy Grout
- Grout Resins

SUBSTRATES

- Ceramic & Mosaic Tiles
- Concrete
- Plaster
- Sinks & Tubs
- Metal Fittings

QUICK REF GUIDE

| | |
|--------|--|
| Colour | White |
| Area | Internal External |
| Used | Wall Floor |
| Size | 1L - 508100 5L - 508101 |





TILING PRIMERS ADDITIVES

Primers
Additives
Admixtures

**TRADIES
TRUST**



UniPrime

Acrylic based primer

RLA Uniprime is an acrylic based universal wall / floor primer for use on porous surfaces prior to the application of RLA tile adhesives. Uniprime increases the adhesion of tile adhesives onto the substrate. Uniprime can be applied a variety of common building substrates.

ADVANTAGES

- Internal / External
- Floors / Walls
- Waterbased

SUBSTRATES

- Porous concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

| | |
|------------|--|
| Colour | Blue |
| Uses | Wall / Floor |
| Coverage | 8-10m² per litre |
| Dry Time | 30 Minutes |
| Size- Code | 1L - RL7170-1 5L - RL7170-5 20L - RL7170-20 |



Universal Primer

Water based acrylic primer

RLA Universal Primer is a rapid drying, solvent free, low VOC, water based acrylic primer. For use over porous and non porous substrates such as existing tiles, old paint (with the exception of oil based paints), vinyl adhesive, vinyl tiles, carpet adhesive residue, metal surfaces, sealed or burnished concrete floors.

ADVANTAGES

- Rapid drying
- Low voc
- Can be diluted
(for porous surfaces only
- Porous /Non porous substrates

SUBSTRATES

- Cement based tile adhesive residue
- Concrete, grout, screed, render
- Concrete
- FC Sheet

QUICK REF GUIDE

| | |
|------------|--|
| Colour | Green |
| Area | Internal External |
| Uses | Wall floor |
| Coverage | 7-10m² per litre |
| Dry Time | 30 - 60 Minutes |
| Size- Code | 1L - RL7167-1 5L - RL7167-5 20L - RL7167-20 |



UniFlex

Additive

Uniflex is a white, high solids, flexible acrylic additive. It can be used internally or externally on wall and floor surfaces. Uniflex when mixed with RLA cement based adhesives can be used to bond tiles over concrete, render, rendered brickwork, blockwork.

ADVANTAGES

- Grout additive for RLA grout range
- Adhesive booster for cement based tile adhesives
- Adhesive booster for pool tiling
- Additive for sand/cement screeds

SUBSTRATES

- Cement based tile adhesives
- Grouts, screed, render
- Concrete / FC sheeting
- Plasterboard

QUICK REF GUIDE

| | |
|------------|--|
| Colour | White |
| Area | Internal External |
| Coverage | Refer TDS Application Dependant |
| Size- Code | 1L - RL7180-1 5L - RL7180-5 20L - RL7180-20 |



QuickSet

Liquid additive cement accelerator

Quick Set will accelerate the curing of any product that is based on Portland Cement. Quick Set is most effective in cold temperatures (5 to 15 degrees C). Quick Set will work differently depending on the nature of the product and the exact performance can only be established by trialing.

ADVANTAGES

- Fast drying
- Liquid additive
- Achieve initial strength
- Easy to use

MIX WITH

- Portland Cement Adhesives
- Cement grouts
- Renders and screeds
- RLA Mastik, MoreFlex, AddFlextra etc

QUICK REF GUIDE

| | |
|-----------|----------------------------|
| Colour | Blue |
| Area | Internal External |
| Size- Cde | 5L - RL7610-5 |



TILE AND STONE SILICONE



Silicone
Caulking guns

**TRADIES
TRUST**



Available in
8 popular
colours

* Colours are indicative only



Tile and Stone Silicone Sealant

High performance sealant for tiling applications

An anti-fungal, non-diluted, high performance, UV resistant neutral cure silicone sealant. Designed for sealing joints or seams in ceramics, plaster, metal and timber [natural or painted] in wet areas. Kitchens, bathrooms, laundries, toilets and wherever fungal growth might occur.

ADVANTAGES

- Fast curing
- UV Stable
- Mould resistant
- ± 25% flexible
- Neutral curing

USES

- Perimeter sealing of baths, basins, shower basins, spas and sinks.
- Ceramic and other tiles & natural stones
- Window frames.
- Exhaust fans.
- Metal fixtures including shower frames.

QUICK REF GUIDE

| | |
|----------|--|
| Area | Internal External |
| Uses | Wall Floor |
| Coverage | 5mmx5mm = 13m |
| Dry Time | 30min Touch Dry |
| Size | 300mL |
| Colours | White - 610435 Mid Grey - 610437 Slate - 610438 Light Grey - 610436 Charcoal - 610439 Cappuccino - 610442 Black - 610440 Beige - 610441 |



Caulking Gun

Heavy duty skeleton caulking gun

Steel skeleton frame. For easy application of sealant or adhesives around corners without having to stop or reposition the nozzle. Handle combines plunger and release clip.

ADVANTAGES

- Steel skeleton frame
- Handle with plunger & release clip
- Rotating barrel enables continuous application round tight corners
- For application of sealants & adhesives

QUICK REF GUIDE

| | |
|-----------|---|
| Colour | Black w/ Orange trim |
| Size Code | 300ML CTG - A1380 850ML CTG - 770502 |



ACOUSTIC ADHESIVES RANGE



Acoustic adhesives

**TRADIES
TRUST**



Acoustic Adhesive Dry Area

RLA Dry Area Acoustic Mat Adhesive is a water based, synthetic polymer adhesive designed for direct sticking of approved acoustic mats in dry areas. It is a solvent-free, low odour, adhesive.

SUITABLE RESIDUES:

- Water Based
- Solvent Free.
- One-part, ready to use.
- Low Odour Green Star Complaint
- IEQ-13 v2 & IEQ-11 v1.1

SUBSTRATES

- Adhering RLA Approved Acoustic mats to most internal concrete subfloors.

QUICK REF GUIDE

| | |
|--------|---------------------------|
| Colour | Beige |
| Area | Internal |
| Used | Concrete substrate |
| Size | 15 Litres |
| Code | RL-7197-15 |



Acoustic Adhesive Wet area

SMP technology adhesive

RLA Wet Area Acoustic Mat Adhesive is a single-part, permanently flexible SMP adhesive designed for direct sticking of approved Acoustic Mats in wet areas like showers and balconies. It is a solvent-free, low odour, adhesive.

ADVANTAGES

- No shrinkage
- One-part, ready to use and easy to spread
- Low Odour Green Star Complaint
- IEQ-13 v2 & IEQ-11 v1.1
- Non foaming.

USES

- Adhering RLA Approved acoustic mats
- Engineered timber, parquet, and timber sheet directly to concrete.

QUICK REF GUIDE

| | |
|--------|---------------------|
| Colour | Beige |
| Uses | Wall / Floor |
| Size | 10 Litres |
| Code | RL1010-15 |



StoneSet

Moisture sensitive stone adhesive

- Rapid setting: 2 Hours to Grout, 4 Hours Full Traffic.
- White polymer modified, Non-slump.
- Suitable for Class A Moisture Sensitive Tiles.
- Can be used over Green Screed.
- Cost Effective.

C2S1FTE

RAPID SETTING

INTERNAL / EXTERNAL

WALL / FLOOR

LOW VOC

AUSTRALIAN MADE



TRADE TRUSTED ADVICE

The MyRLA app gives you instant access to a nationwide technical & sales force, at your fingertips. To help with project advice, product selection and job support.



MyRLA APP

Project & Product Advice
Usage calculators
Specification services
Data Sheet Downloads
Weekly prizes
& more

T. 1800 242 931

VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

363 Wentworth Ave
Pendle Hill,
NSW 2145

QLD

57 Fulcrum Street
Richlands
QLD 4077

WA

24 Hanwell Way
Bassendean,
WA 6054

SA

30/32 Park Ave,
Woodville North
SA 5011

www.rlapolymers.com.au